


SOIL PH METER

Model : PH-212

ISO-9001, CE, IEC1010

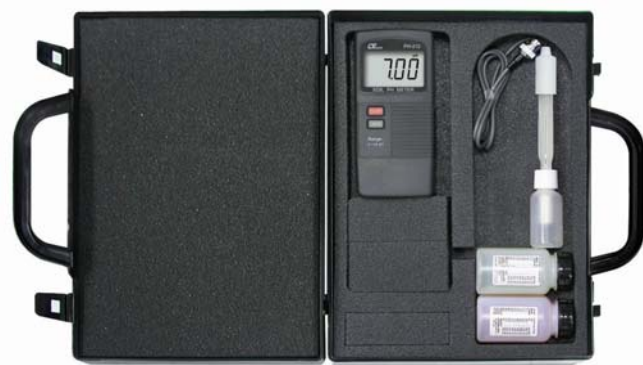

Lutron

LUTRON ELECTRONIC

The Art of Measurement

SOIL PH METER

Model : PH-212

FEATURES	
* Kits with pH meter, soil pH electrode, pH 4.0 /pH 7.0 standard buffer solution and carrying case.	
* Spear Tip pH electrode (included), ideal for penetration pH measurement into soil, meats, cheese and other type of measurements requiring sample penetration. The electrode features a very durable glass measuring spear packaged in a rugged virtually unbreakable epoxy body.	
* Build in Slop (pH 4, pH 10) and Cal. (pH 7) adjust VR.	
* Large LCD display.	
* Easy operation, compact size.	
* Water resistance on the front panel.	
* Full line optional general purpose pH electrodes.	
* Application : Agriculture, Gardening, Food industrial, Education, School, Colleges, Laboratory, Industrial and Quality control.	

SPECIFICATIONS			
Display	13 mm (0.5") LCD, 3 1/2 digits.	Operating Temperature	0 to 50 °C (32 to 122 °F)
Measurement Range	0 to 14 pH x 0.01 pH	Operating Humidity	Less than 80% RH.
Resolution	0.01 pH	Calibration Knob	External pH 4 (slope adj.) & pH 7 (Cal. adj.).
Accuracy	± 0.07 pH (pH5 - pH 9)	Power Consumption	Approx. 2.0 mA.
	± 0.1 pH (pH 4 - pH 10)	Dimension	135 x 60 x 33 mm, (5.3 x 2.4 x 1.3 inch).
	± 0.2 pH (pH 1 - pH 3.9, pH 10.1 - pH 13)	Weight	196 g/0.43 LB (including battery).
Input Impedance	10 ¹² ohms.	pH electrode (Optional)	Any connector pH Electrode with BNC connector.
Temperature Compensation	Not necessary to make adjustment.	Standard Accessories	Instruction Manual..... 1 PC. Soil pH electrode, PE-06HDA..... 1 PC. pH 4.0 buffer solutuin, PH-04..... 1 PC. pH 7.0 buffer solutuin, PH-07..... 1 PC. Carrying case, CA-06..... 1 PC.
Sampling Time	Approx. 0.4 second.		
Hold Function	To freeze the display reading value.		
Power Supply	006P DC 9V battery.		

SOIL PH ELECTRODE (Included)			
pH Measuring Range	1 to 13 pH (typical 0 to 14 pH).	Repeatability	0.05 pH.
		Response time	≥ 2 minutes.
pH Operation Temperature	5 to 60 °C (41 to 140 °F).	Body Material	Epoxy.
		Connector	BNC.
pH Electrode Structure	Combination type.	Mechanical Protection	With protection bottle (soaker bottle) on the electrode head.
		Weight	68 g (including cable & socket).
Reference of pH Electrode	Ag/AgCl, Double Junction.	Dimensions	Body length - 160 mm. Body Dia. - 12 mm. Cable length - 1000 mm.
		Zero Potential for pH Value	7± 1 pH.

* Appearance and specifications listed in this brochure are subject to change without notice.

0907-PH212